

8A8DLTP-DEKA

SPECIFICATIONS

| | |
|-----------------------------|------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 250Ah |
| Capacity at C/20 | 245Ah |
| Weight | 163 lbs. (74 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -40°F (-40°C) - 140°F (60°C) |

For Charging Parameters please refer to
www.mkbattery.com

Click on Technical Data, then on Photovoltaic Charging
Parameters in the PV/Solar section

Vent Self-sealing

Terminal T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS


Inches (mm)

Length **21.03 (534 mm)**
Including handles

Width **11.00 (279 mm)**

Height **10.82 (275 mm)**
Including terminals

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

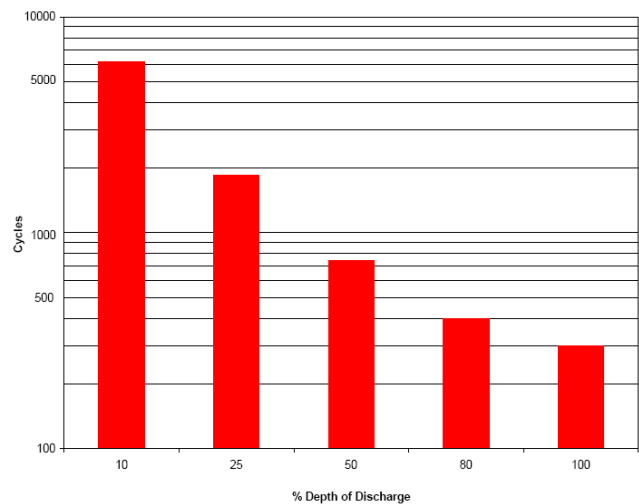

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

