

Upgrade Procedure for FREEDOM X Bluetooth Remote Panel Firmware through FREEDOM XC PRO Inverter/Charger


808-0817-02

WHAT YOU NEED:

Download the latest firmware version from www.xantrex.com

Computer | Internet Connection | USB Drive | Access to FREEDOM XC PRO inverter/charger

STEP 1

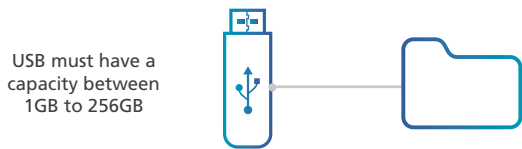

On a USB stick, create a folder titled exactly:
FreedomX_Firmware

STEP 2



Place the desired remote firmware file **REMOTE.bin** onto the stick inside the **FreedomX_Firmware** folder. Note that the remote firmware file must be renamed exactly to **REMOTE.bin**.

STEP 3



Safely eject the USB from the PC.

STEP 4



Turn off all AC loads and turn off the vehicle engine. Ensure that the inverter/charger remains powered on.

STEP 5



Insert the USB into the inverter/charger unit. Upon inserting the USB stick, the FREEDOM XC PRO inverter/charger LED should flash showing that the USB is recognized and the firmware is being downloaded.

During this update, all LEDs on the remote panel should be on and the remote will not be functional.

STEP 6



After the LED has stopped flashing, use the remote's local display to view the remote firmware screen (U2) which should show the new remote firmware version.